

# Series 3 Technician's Installation and Service Training Manual

## Wiring a single contact device to cause an open function




**Warning Electrical Shock Hazard**  
To prevent serious injury or death always ensure power is disconnected when wiring anything into the ZAP Controller.

**Materials Needed**  
16-20 awg 2 conductor cable, Single contact device such as a Single Button wall station, microwave sensor, loop detector, treadle, SPST Ceiling Pull, etc.

Isolate the power supply before wiring any device into a ZAP Controller.

Using your 2 wire cable, insert one wire into the Open position of TB3 and terminate it into one side of the one button station. (Orange wire diagram)

Next, insert the other wire into the 0V position of TB3 and terminate it into the other side of the one button station. (black wire diagram)

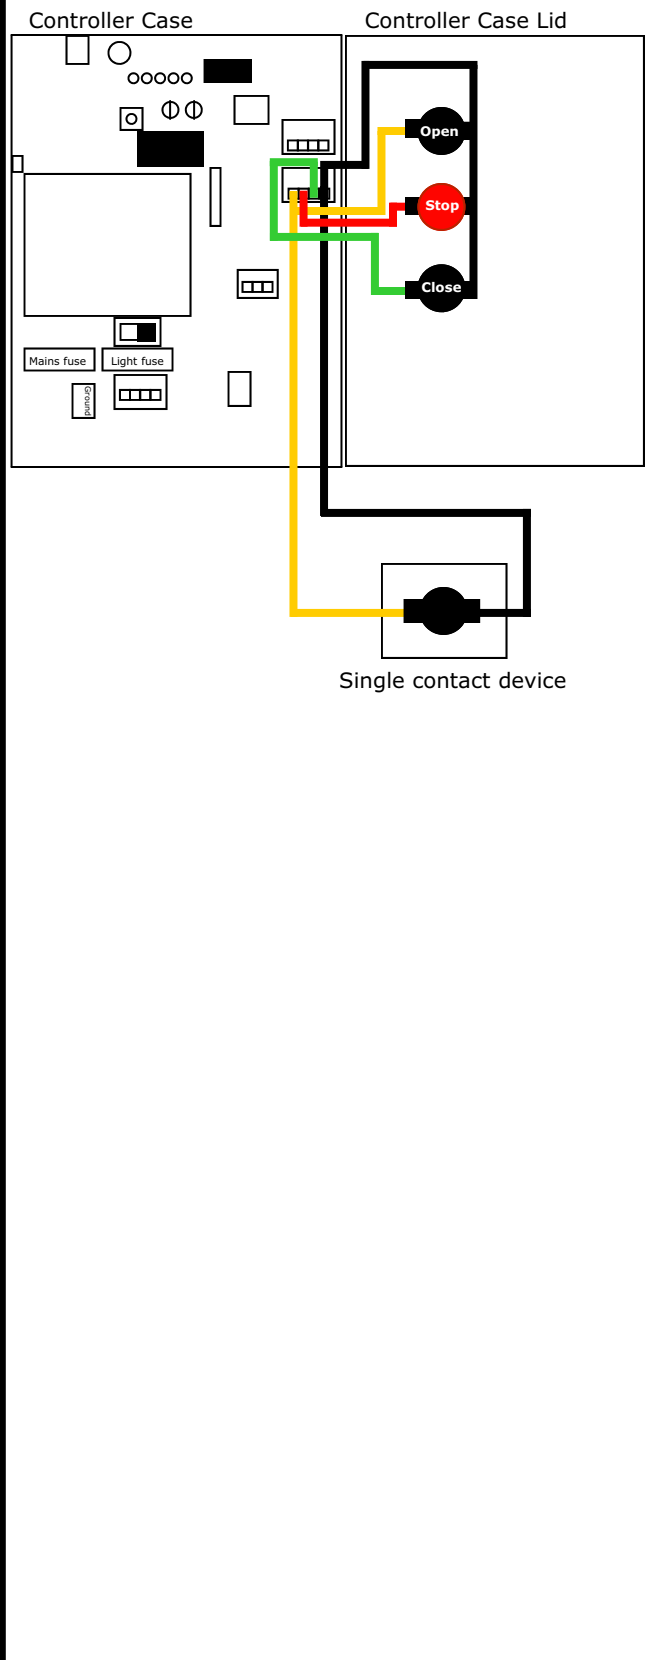

**Series 3 Technician's Installation and Service Training Manual**  
Wiring a single contact device to cause an open function

Series 3 Wiring a single contact device to cause an open function

### ZAP Series 3 Simply Logical

ZAP Controls  
100 Waterloo Blvd. Anglesey Business Park, Littleworth Road, Cannock, Staffordshire, England  
UK Contact 011-44-154-387-9444 sales@zap-uk.com  
USA Contact 931-510-4432 sales@zap-america.com  
USA Tech Support 931-510-4432 via telephone or text  
Online www.zap-uk.com